

LID

80-85%



©



+86 0510-85958787

7



info@hysolar.com
<https://www.hysolar.com>

STC : 1000W/m² 25 =1.5

(Pmpp/Wp)

(Vmpp/V)

(mpp /A)

(Voc/V)

(Isc /A)

NMOT : 800W/m² 20 =1.5 1m/s

(Pmpp/Wp)

(Vmpp/V)

(mpp /A)

(Voc/V)

(Isc /A)

Pmpp/Wp Vmpp/V Impp/A Voc/V Isc/A

5%

15%

25%

(Pmpp) -0.29%/

(Isc) +0.043%/

(Voc) -0.24%/

(NMOT) 42 2°C

(IEC) 1500Vdc





3

IP 68

30A

-40~+85°C

80±5%

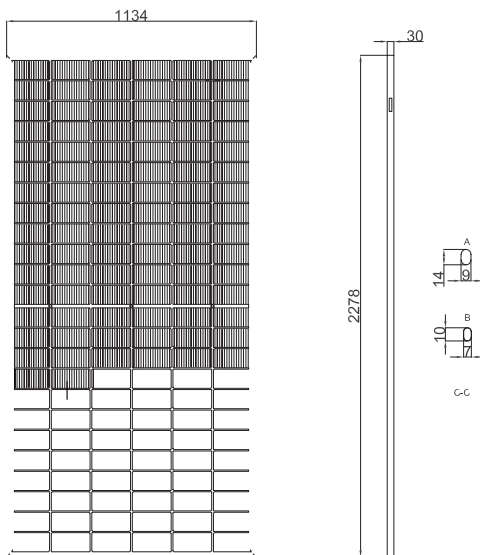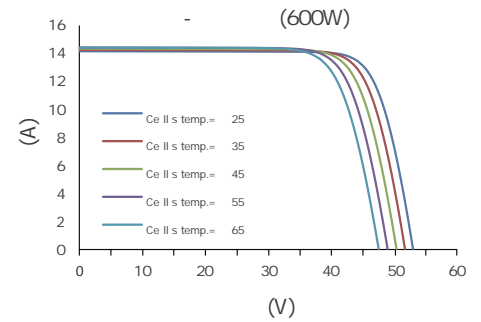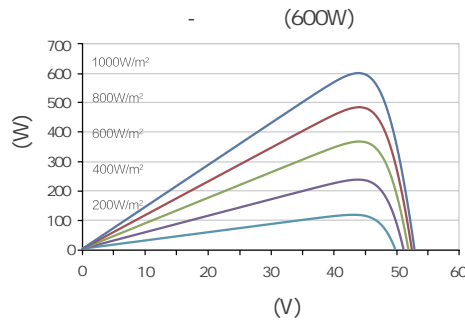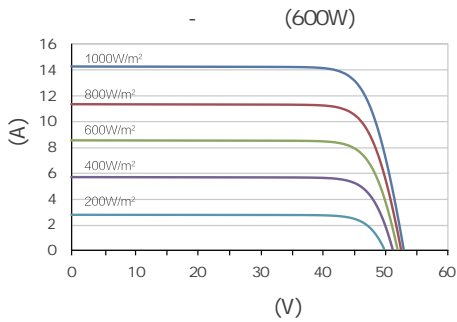

(x x) 2278 x 1134 x 30 mm

N

144 (6*24)

2.0+2.0 mm

: (+) 300 mm (-) 300 mm

(IEC) 4 mm² / 12 AWG

5400 Pa () / 2400 Pa ()

(IEC) PV-HYC11xyz() / MC4 EVO2()

32.1 kg

36 /

1215 kg

(17.5m) 936 /